



# ERA

**Feeder for broilers**





ENG

# ERA

## ■ Optimized design for broilers


Discover the **ERA feeder** for **broiler chickens**, designed to ensure **efficiency** and **practicality** on your farm. With a height of **48.5 mm**, the **low dish** is perfect for **chicks**, allowing them to **feed from their very first days of life**. The **bell with 14 spaces** prevents chicks from accessing the inside of the dish, ensuring **safe management**.

## ■ Zero Waste with the Overflowing System

The **overflowing system** ensures an **abundant release of feed** during the **initial stages**, guaranteeing **continuous and balanced nutrition**. The **anti-waste edge** prevents feed from **spilling out**, while the **compact design** ensures **minimal space usage** without compromising **efficiency**.


## ■ Invest in practicality and simplify the cleaning of your farm

The **rotating dish** makes **cleaning quick and easy**, providing **practical solutions** for a **modern and dynamic farm**.

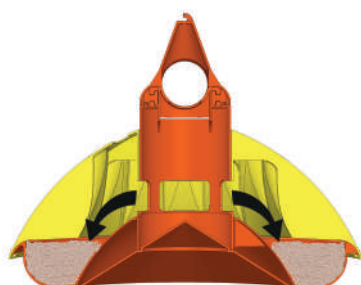

### Day - old chicks

- Ground-level feeder
- The feed flows abundantly from the top openings, fully filling the dish

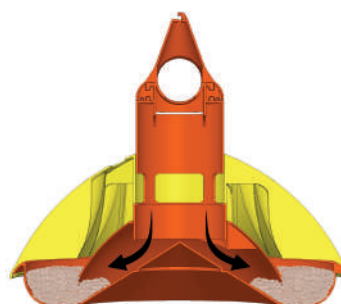

### Growing period

- Suspended feeder
- The feed flows from the bottom in proportion to the set adjustment level
- Three adjustment levels: 12mm, 21mm, 30mm

## Technical Characteristics

### 01 Central Drop

Reinforced discharge with a slot to prevent feed spillage.

### 02 Fixing Cup

Button cap for removal, designed to prevent accidental detachment of the feeder.

### 03 Internal Ring

Three feed adjustment levels for the adult stage, with the option to modify them even during the ongoing cycle.


The collar minimizes feed accumulation.

### 04 External grid


- Rotating dish for quick and residue-free washing.
- Quick-release system for easy and fast removal of the dish.
- Integrated water drainage for cleaning without dish removal.

### 05 Pan

The dish, 48.5 mm high, allows animals to feed from their very first day.

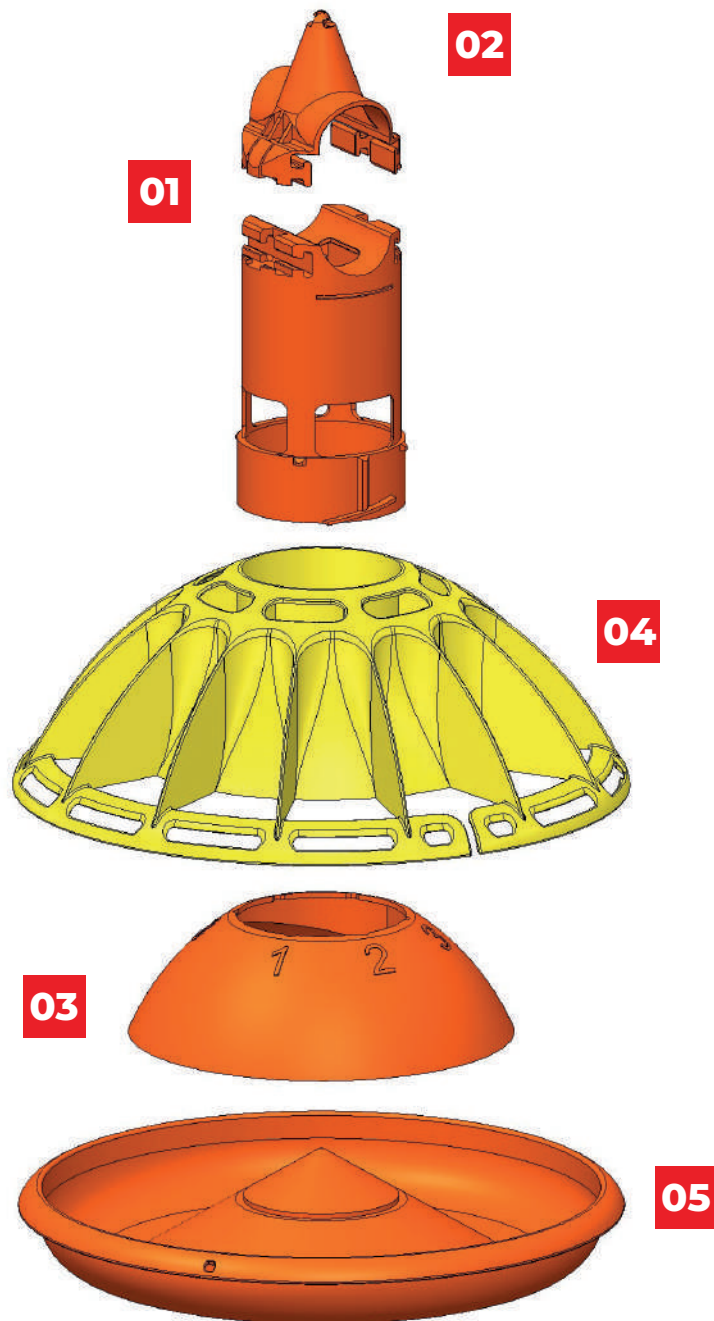

## System

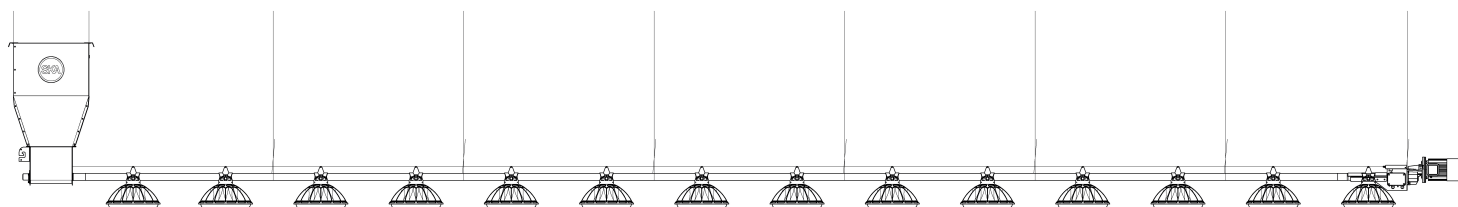

### System

**Drive unit-Power:** 0,37 - 0,55kW

**Capacity:** 350kg/h

**Tube external diameter:** 45mm

**Auger rotation speed:** 295rpm

**Capacità mangime per tubo\*:** 1483g

### Pan

**Height:** 48,5mm

**Diameter:** 340mm

### Capacity

**Capacity broilers, according to the weight:** 50÷80

**Feeder capacity during day- old chicks phase\*\*:** 1530g

**Feeder capacity at level 1\*\*:** 1270g

**Feeder capacity at level 2\*\*:** 1090g

**Feeder capacity at level 3\*\*:** 960g

(\*) Quantity of feed conveyed within a tube without holes.

(\*\*) The values were recorded using feed with a density of 0.7 kg/dm<sup>3</sup>.



SINCE 1954, OUR EXPERIENCE FOR YOUR FUTURE



Meneghin



**Phone:**

+39 0444 - 659700

**Mail:**

ska@ska.it

**Address:**

Via Agosta, 3  
36066 Sandrigo (Vicenza)

[skapoultryequipment.com](http://skapoultryequipment.com)